


Fuse Replacement Bar

Replaces Clip Mounted Fuses

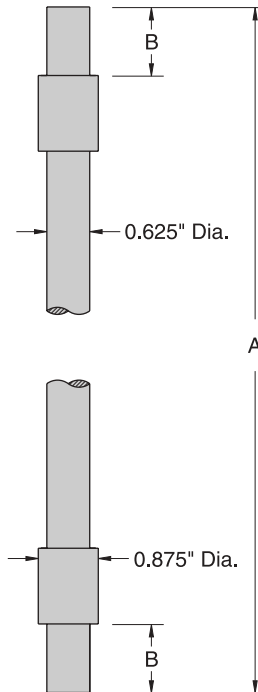

The Elliott Fuse Replacement Bar can be installed in place of a clip mount type current-limiting fuse (that has 0.625-inch diameter ferrels) when a non-fused connection is required. The fuse replacement bar is selected based on fuse mounting codes listed below.

CAUTION: Fuse Replacement Bars should be used only after you have determined that the use of this device is acceptable in accordance with your company's engineering, operating and safety practices.

| Catalog Number | Fuse Mounting Code | A | B | Weight Lbs. (kg) |
|----------------|--------------------|----------|---------|------------------|
| 3903-CBCM4 | 4 | 10.0" | 1.0" | 1.2 (0.5) |
| 3903-CBCM5 | 5 | 14.3125" | 1.0" | 1.6 (0.7) |
| 3903-CBCM6 | 6 | 17.125" | 1.0" | 1.9 (0.9) |
| 3903-CBCM9 | 9 | 27.375" | 1.1875" | 3.0 (1.4) |
| 3903-CBCM10 | 10 | 35.375" | 1.1875" | 3.7 (1.7) |



Fuse Replacement Bar
Replaces Clip Mounted Fuses

Descriptive
Bulletin
3903
Page 2 2001

**If you do not find the design
you need
PLEASE CONTACT
our REPRESENTATIVE or the FACTORY**